

CAP-V SERIES

The World's Only Impact-Resistant Infrared and Visual Window Series

The **CAP-V Series** adds a visual viewing pane that allows visual and infrared (IR) inspections to be completed simultaneously.

The entire CAP Series was designed to comply with all mandatory impact, load and flammability requirements. (Industrial standards NO crystal or non-reinforced polymer IR window can possibly meet).

The **CAP-VC** offers locking covers for your IR window. These are useful in areas of high traffic and protect the IR and visual viewing panes from impacts, flying debris and dust. Available in two protective cover options:


- **CAP-VC** range offers a protective cover for the IR window
- **CAP-VCH** range offers a single cover for both IR window and visual viewing pane



Protected by Our Unconditional Lifetime Warranty

Specifications

Materials	
Window Housing and Cover	Standard product construction of Stainless Steel; custom materials available
Optic	UL 746 compliant, IR transmissive polymer; -40°C (-40°F) to 325°C (617°F)
Gaskets	UL 94 5VA TPE; -40°C (-40°F) to 273°C (523°F)
Hardware	316 stainless steel
Other	
Useful Temperature Rating	-40°C (-40°F) to 200°C (392°F)
Water and Dust Ingress	IP65 / NEMA 4: closed and when in use

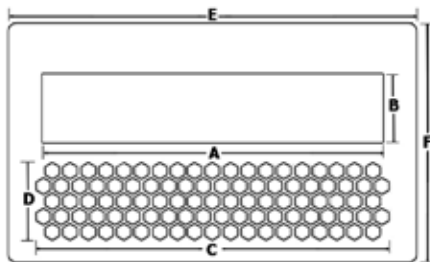

Dimensions

Model	Visual Window	IR Window	Overall Dimensions
CAP-V-6, CAP-VC-6, CAP-VCH-6	A= 9.7 cm (3.8 in), B= 5 cm (1.95 in)	C= 9.1 cm (3.6 in), D= 5.8 cm (2.3 in)	E= 16 cm (6.3 in), F= 21.8 cm (8.6 in)
CAP-V-12, CAP-VC-12, CAP-VCH-12	A= 23.9 cm (9.4 in), B= 5 cm (1.95 in)	C= 23.6 cm (9.3 in), D= 5.8 cm (2.3 in)	E= 30.5 cm (12.0 in), F= 20.6 cm (8.1 in)
CAP-V-24, CAP-VC-24, CAP-VCH-24	A= 54.1 cm (21.3 in), B= 5 cm (1.95 in)	C= 53 cm (20.9 in), D= 5.8 cm (2.3 in)	E= 61 cm (24.0 in), F= 21.8 cm (8.6 in)

Caution: The dimensions listed above are not installation dimensions. Do NOT cut prior to receiving your IRISS window and installation template.

CAP-V Series Features:

- Separate visual and IR viewing panes allow for dual inspection
- Durable, fully impact-resistant
- Fixed And Stable Transmission (FAST)
- Proven compatibility with acids, alkalis, UV, moisture, humidity, vibration and high frequency noise
- Reinforcing grills comply with IP2x standard for safe maximum hole size and fail-safe design
- Optional cover with locking catches
- Customizable; if you don't see what you need in the standard offering you can configure:
 - Housing Materials
 - Gaskets
 - Locking Devices
 - Labeling
 - Color
- Fitting templates and instructions included

Certifications:

- Certified by UL in the USA & Canada to the following standards:
 - UL 50V
 - UL 50E
 - UL 746C: Impact and Flammability
 - UL1558: Impact and Load Resistance
 - UL 508A; ANSI UL 508A
- IEEE C37 20.2.a.3.6: Impact and Load
- IP65 / NEMA 4
- Lloyds of London Type Approval
- American Bureau of Shipping (ABS)
- CSA C22.2 No. 14-10

